


# SMP-RP-6K

## Unlimited Width Cable Reel Roller System (Sold in Pairs)

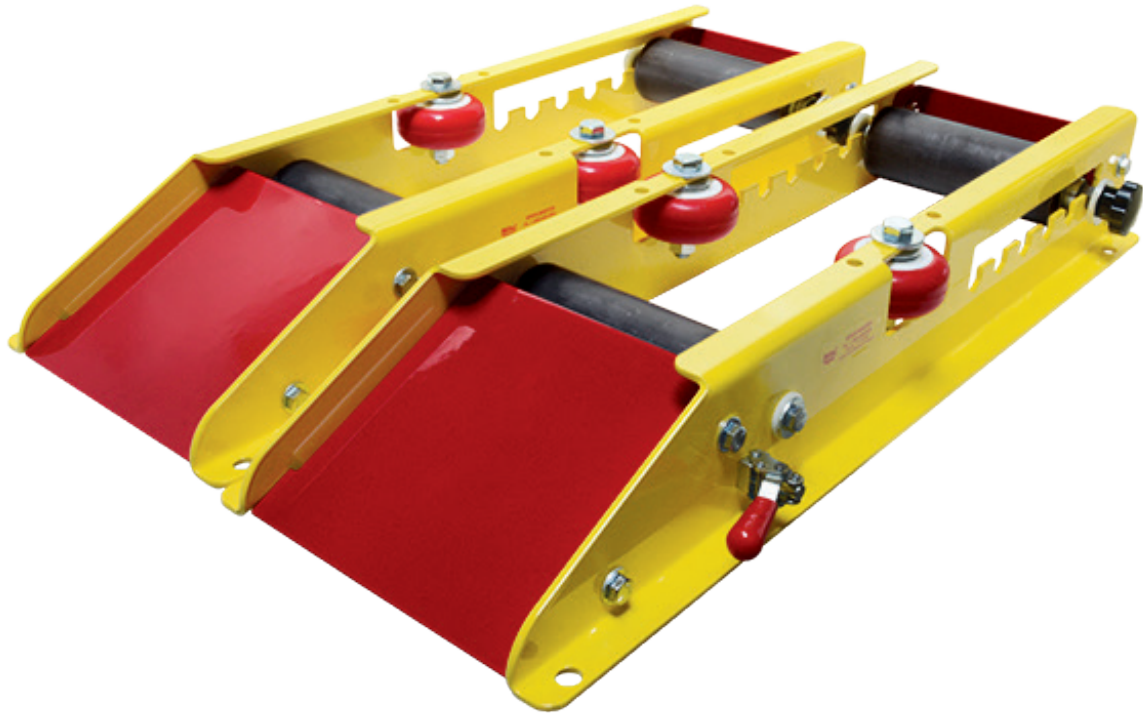

The SMP-RP-6K reel roller system is ideal for storage, dispensing and management solution of cable reels ranging from 12" to 48" in diameter. The SMP-RP-6K is sold in pairs and can accommodate cable drums with weights up to 6,000 pounds. The seven gauge steel frames include six (6) position adjustments for the rollers, a slanted loading ramp, front roller locks for easy loading & unloading, and pre-drilled holes for permanent mounting applications.

### Features:

- Sold as a set: one (1) SMP-RP-6K per reel (reel sold separately)
- 6,000 lbs. capacity per pair
- Product weight: 32 lbs. each (64 lbs. per set)
- Minimum reel width: 6" (15 cm)
- Maximum reel diameter: 48" (122 cm)
- Hex bore ball bearing reel rollers
- Powder coated finish
- Six (6) position roller adjustment
- Frames constructed of 7-gauge steel bolted together
- Slanted loading ramp & front roller lock for loading/unloading
- Pre-drilled base for bolt-down installation
- Outside roller dimensions: 4.5" H x 11" W x 29.5" D
- Made in the USA



P.O. Box 12017 Marina del Rey, CA 90292  
Phone: 310-822-6290 Fax: 310-306-9343  
Email: [info@spoolmaster.com](mailto:info@spoolmaster.com)  
Visit us online at [www.spoolmaster.com](http://www.spoolmaster.com)



# SMP-RP-6K



## Unlimited Width Cable Reel Roller System (Sold in Pairs)

### Dimensions Per Roller:

<b>Length:</b>	29.5" (75 cm)
<b>Width:</b>	11" (28 cm)
<b>Depth:</b>	4.5" (11.5 cm)
<b>Weight:</b>	32 lbs (14.5 kg)
<b>Ramp (Length):</b>	8" (20.3 cm)
<b>Ramp (Width):</b>	6" (15.2 cm)

### Distance Between Center Points on Rollers:


<b>Position 1:</b>	9.5" (24 cm)
<b>Position 2:</b>	11" (28 cm)
<b>Position 3:</b>	12.5" (32 cm)
<b>Position 4:</b>	14.25" (36 cm)
<b>Position 5:</b>	15.75" (40 cm)
<b>Position 6:</b>	17.5" (44 cm)

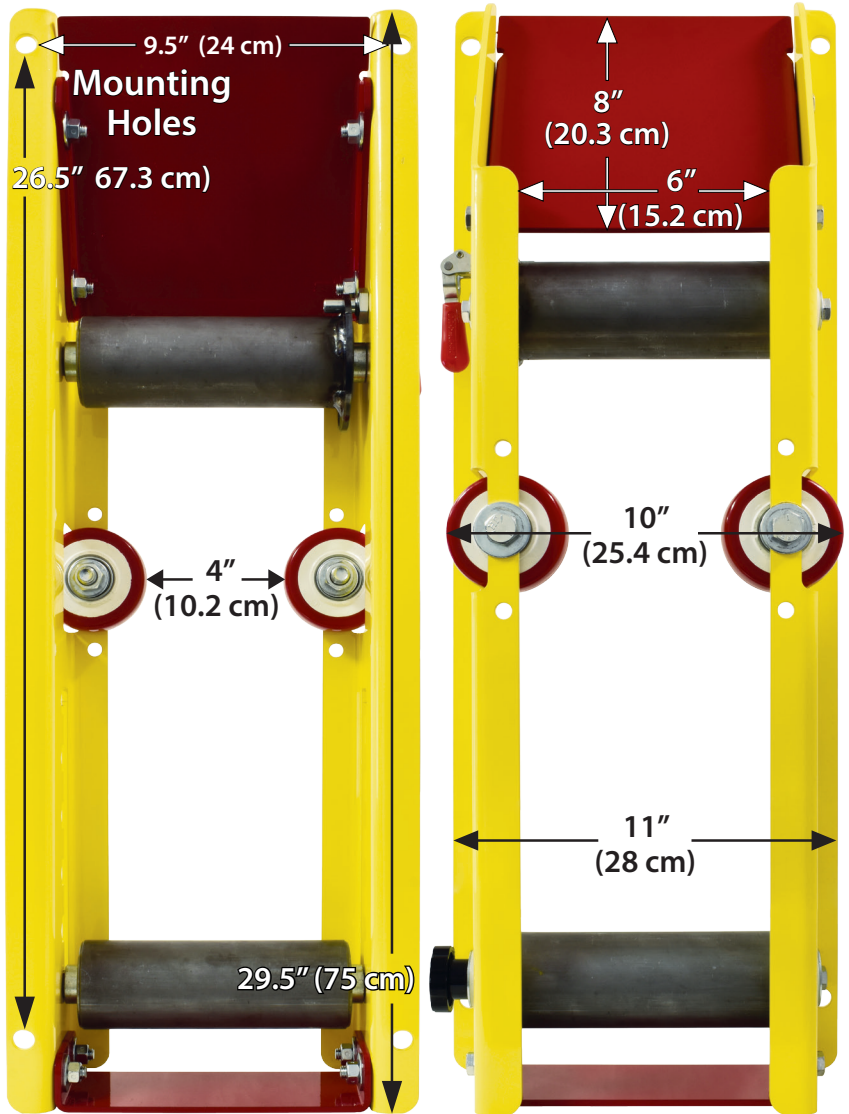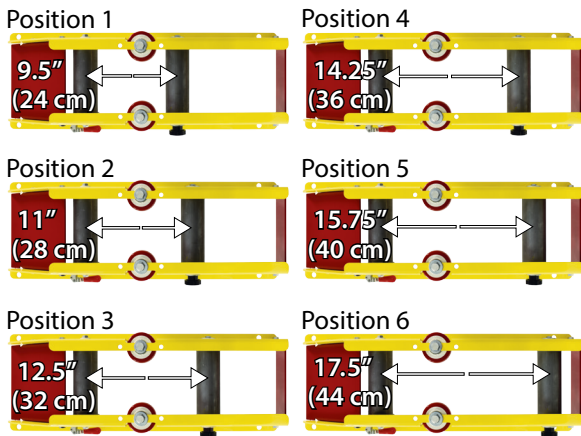

## Optional Accessories for SMP-RP-6K Reel Roller Systems

### SMP-ASA


#### Arbor Support Assembly



The SMP-ASA mounts on the outside of both reel rollers to prevent dislodging of cable reels, requires a 1.5" pipe (not included). One (1) SMP-ASA set includes two (2) supports for one (1) SMP-RP-6K set.

### SMP-PSA


#### Platform Stabilizer Assembly



The SMP-PSA is a set of red brackets bolted to the back of one (1) SMP-RP-6K reel roller set to ensure parallel positioning of roller subassemblies. This prevents ramp shifting or wheel wedging. Requires a 1.25" pipe (not included).

### SMP-PRC

#### Polyurethane Roller Covers (Orange Rollers)



Protects the steel rollers and bearings from impact, shock & vibration. Extends life of the rollers, especially from rough-edged spools. One (1) SMP-PRC per one (1) SMP-RP-6K set, must be ordered together.



P.O. Box 12017 Marina del Rey, CA 90292  
 Phone: 310-822-6290 Fax: 310-306-9343  
 Email: info@spoolmaster.com  
 Visit us online at [www.spoolmaster.com](http://www.spoolmaster.com)

